
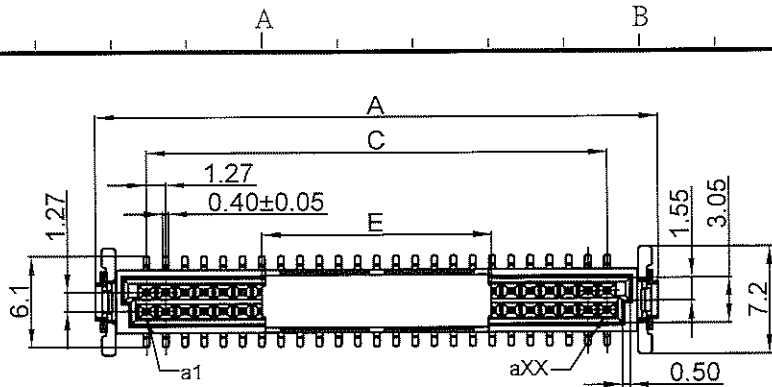
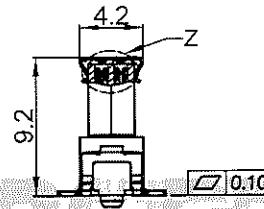



DETAIL Z
SCALE 4:1

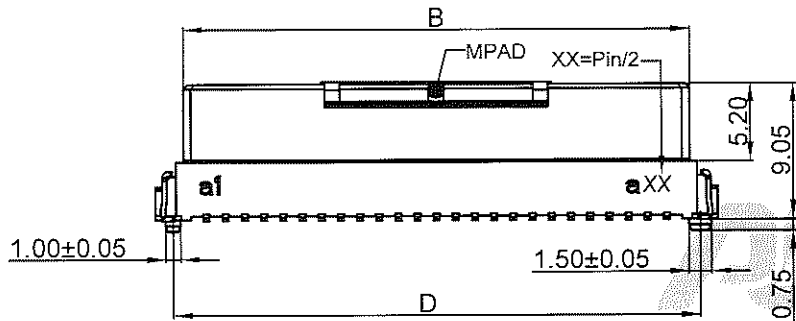

Number of Contacts ——— Plating Code:


B : MPAD+Reel

Definition	Code
◎ Tin plated	A
◎ Gold plated:	
flash B 5u" D 10u" E	
15u" F 20u" G 30u" J	
◎ Duplex plating:	
flash K 5u" M 10u" N	
15u" P 20u" Q 30u" U	
◎ Standard: B	
◎ All plating is lead free.	

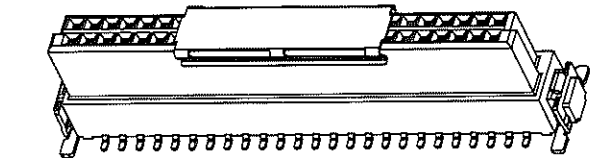

3D VIEW

80	56.28	52.55	49.53	53.95	15.2
68	48.66	44.93	41.91	46.33	
50	37.23	33.50	30.48	34.90	
40	30.88	27.15	24.13	28.55	
32	25.80	22.07	19.05	23.47	
26	21.99	18.26	15.24	19.66	4.2
20	18.18	14.45	11.43	15.85	
16	15.64	11.91	8.89	13.31	
12	13.10	9.37	6.35	10.77	
No.of Contacts	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E

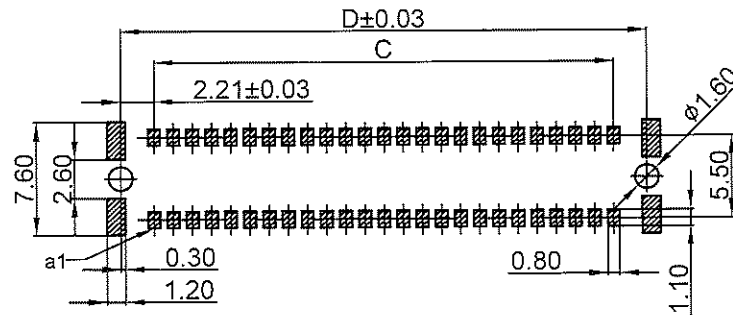

RECOMMENDED PCB LAYOUT



TOLERANCE TABLE	
X. ± 0.30	X.° ± 3°
.X ± 0.25	.X° ± 2°
XX ± 0.20	

SCALE	2:1
UNIT	mm
SIZE	A4

DRAWN	张文浩
CHECK	何志明
APPROVE	刘新明

DATE	2024/03/28
DATE	2024/03/29
DATE	2024/03/28

DWG. NO.	600-0000-2395
PARTS NO.(INTENDED USE)	LCMAAXXXBX00

TITLE	CUSTOMER DRAWING
-------	------------------

REV.	2
SHEET	1/3

版次	ECN 编码	描述		设计/日期
1	EL24010028	初版发行		张文浩_2024/01/18
2	EL24030064	改前	改后	张文浩_2024/03/28
			增加包装规范	

NOTES: (Unless otherwise specified)

1. Dimension shall be interpreted per ANSI Y14.5M.

2. Materials:

Insulator material: High Temperature Thermoplastic,
UL 94V-0; Color: Black.

Contact material: Copper alloy.

3. Current Rating: 1.7 A.

4. Voltage Rating: 30V AC.


5. Working Temperature: -55°C ~ +125°C.

6. Harmful material should be compliant to doc.


"EI-0005" standards.

7. Product number matrix:

LCMAA XXX B X 00

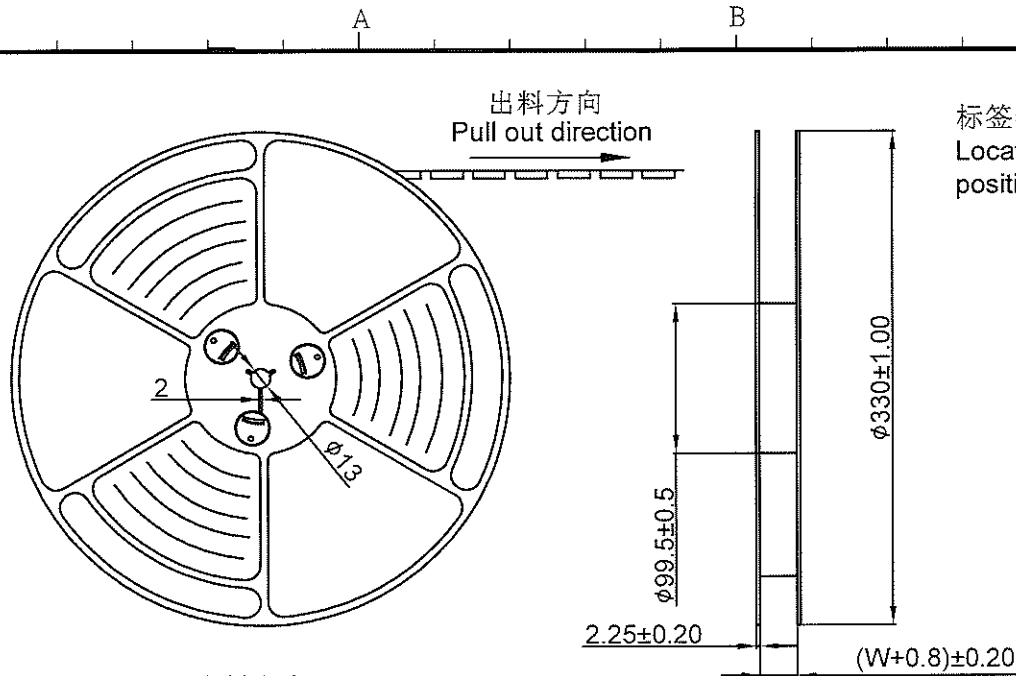


标签黏贴处(朝卷装包材的小定位孔一侧)
Location of label sticking (label at small positioning hole of the carrier tape side)

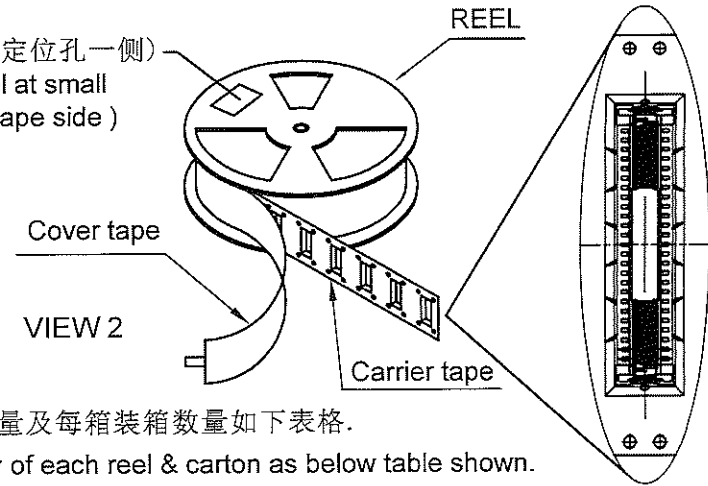

备注(NOTES):

- 每卷包装数量及每箱装箱数量如下表格。
Packing q'ty of each reel & carton as below table shown.
- 上胶带覆盖下包装带用自粘包装。
Use cover tape to cover and seal up.
- 每个纸箱放2个珍珠棉。
Every carton use 2pcs EPE.
- 将装满产品的卷盘放入纸箱以胶带封口。
Put reels in the carton and use adhesive tape to seal up.

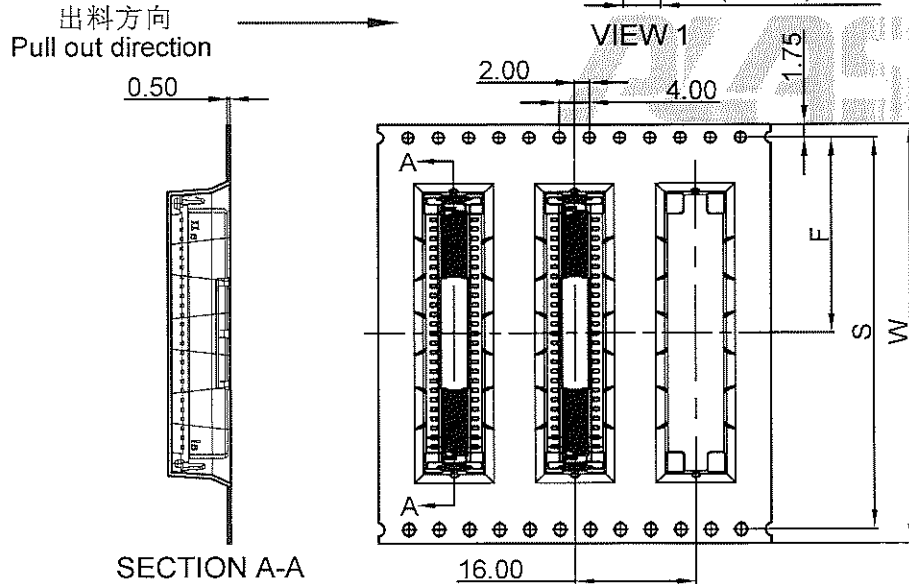

产品料号 (Product No.)	尺寸(Dimension)			包装容量(Packing capacity)		
	W	S	F	PCS/REEL	REELS/CARTON	PCS/CARTON
LCMAA012BX00	24.00		11.50	350	7	2450
LCMAA016BX00	32.00	28.40	14.20	350	5	1750
LCMAA020BX00	32.00	28.40	14.20	350	5	1750
LCMAA026BX00	44.00	40.40	20.20	350	4	1400
LCMAA032BX00	44.00	40.40	20.20	350	4	1400
LCMAA040BX00	44.00	40.40	20.20	350	4	1400
LCMAA050BX00	56.00	52.40	26.20	350	3	1050
LCMAA068BX00	72.00	68.40	34.20	350	2	700
LCMAA080BX00	72.00	68.40	34.20	350	2	700

PLASTREN

TOLERANCE TABLE	
X. ± 0.30	X.° ± 3°
.X ± 0.25	.X° ± 2°
.XX ± 0.20	

SCALE 1:1
UNIT mm
SIZE A4

DRAWN
CHECK
APPROVE

张文浩

DATE

2024/03/28

DWG. NO.

600-0000-2395

PARTS NO.(INTENDED USE)


LCMAAXXXBX00

TITLE

CUSTOMER DRAWING

REV.
2

SHEET
2/3

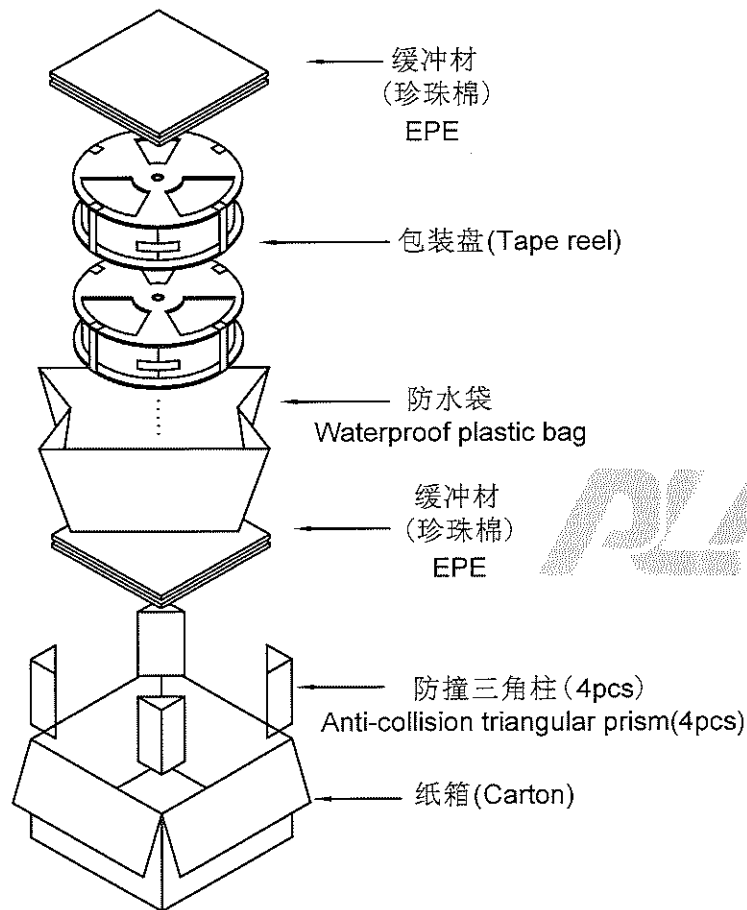

VIEW 3


备注 (NOTES):

1. 带子引导长度如下.

Lead tape length

转绕方向

Pull out direction

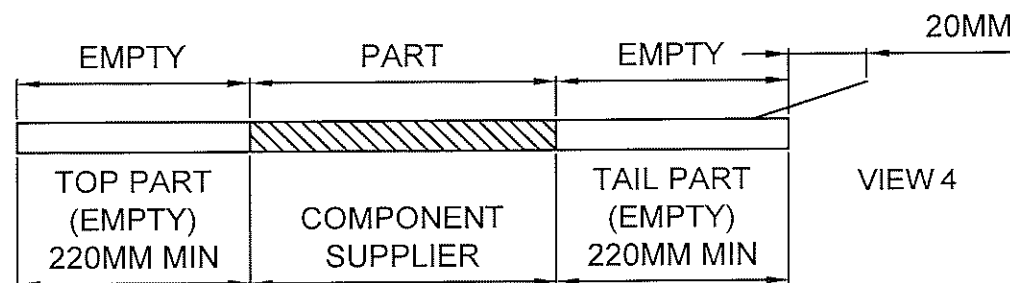


2. 上带剥拉力为: 0.2~1.3N (20gf~130gf)

Peeling off force of top tape :0.2~1.3N(20gf~130gf)

出货运输过程中一定注意: 卷带在运输过程中不能散开

This requirement should be applied at shipment:

The reel tape can not be separated during transportation.

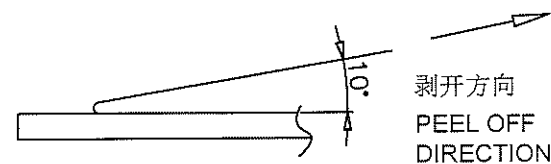

VIEW 5

PLASTREN

TOLERANCE TABLE

X. ± 0.30	X.° ± 3°
.X ± 0.25	.X° ± 2°
.XX ± 0.20	

SCALE 1:1

UNIT mm

SIZE A4

DRAWN

张文浩

DATE

2024/03/28

CHECK

152010

DATE

2024/03/28

APPROVE

152010

DATE

2024/03/28

DWG. NO.

600-0000-2395

PARTS NO.(INTENDED USE)

LCMAAXXXBX00

TITLE

CUSTOMER DRAWING

REV.

2

SHEET

3/3