版次	ECN 编码	描述		设计/日期
X1	EL21120170	初版发行		江蒙 _2021/12/31
		改前	改后	

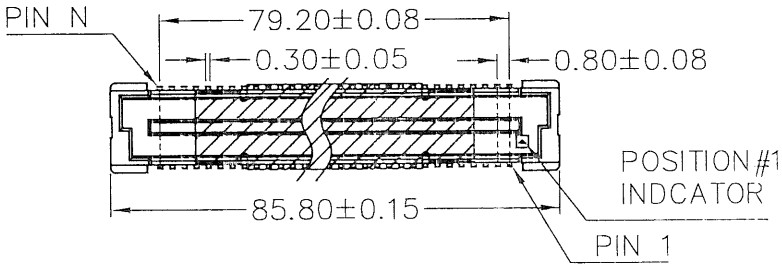

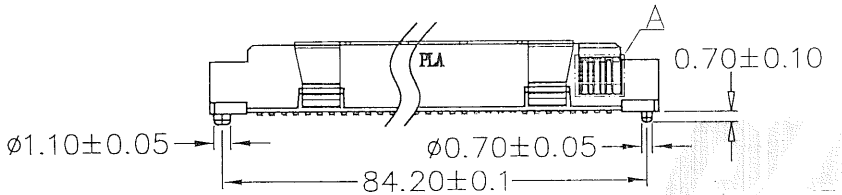

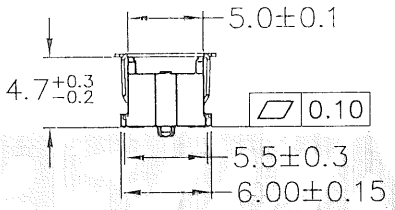

NOTES: (Unless otherwise specified)

1. Dimension shall be interpreted per ANSI Y14.5M.
2. Materials:
   Insulator material: High Temperature Thermoplastic, UL 94V-0;Color:Natural.
   Contact material: Copper alloy.
3. Current Rating: 0.5A.
4. Voltage Rating: 50V AC/DC.
5. Working Temperature: -40℃ ~ +105℃.
6. Harmful material should be compliant to doc. "EI-0005" standards.
7. Product number matrix:

B E A A A 2 0 0 X X 00

Number of contacts
200:200PIN

B:MPAD+REEL
E:MPAD+TUBE

Plating Code:

Definition			Code
◎ Tin plated			A
◎Gold plated(Function area)			
flash	B	15u"	F
10u"	E	30u"	J
◎Duplex plated(Function area)			
flash	K	15u"	P
10u"	N	30u"	U
◎ Standard: B			

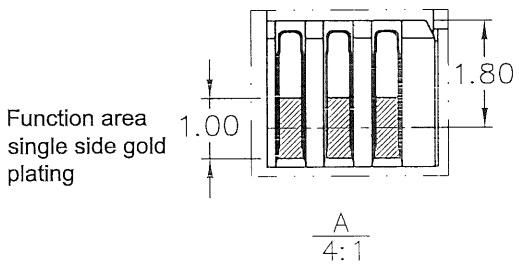

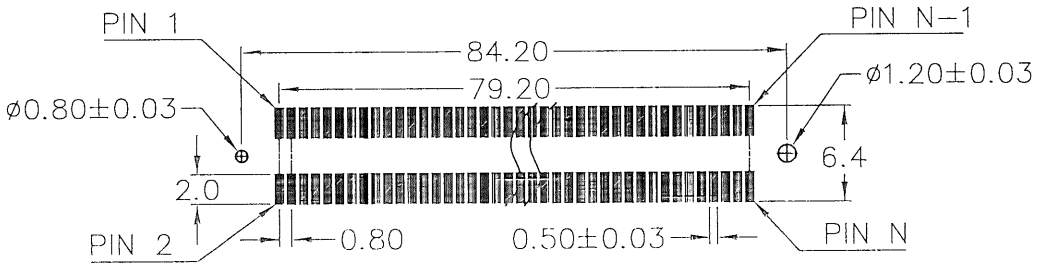

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

	TOLERANCE TABLE		SCALE 2:1	DRAWN 江蒙	DATE 2021/12/31	DWG. NO. 600-0000-2273	TITLE	REV. X1
PLASTRON	X. ± 0.30	X.° ± 3°	UNIT mm	CHECK	DATE 2022/01/04	PARTS NO.(INTENDED USE)	CUSTOMER DRAWING	SHEET 1/1
	.X ± 0.25	.X° ± 2°	SIZE A4	APPROVE	DATE 2022/01/04	BEAAA200XX00		
	.XX ± 0.20							