

版次	ECN 编码	描述		设计/日期
1	EH19090127	初版发行		齐如军_2019/11/08
		改前	改后	

NOTES: (Unless otherwise specified)

1. Dimension shall be interpreted per ANSI Y14.5M.
2. Materials:
Insulator material: High Temperature Thermoplastic, UL 94V-0; Color: Natural.
Contact material: Copper alloy.
3. Current Rating: 0.5A.
4. Voltage Rating: 50V AC/DC.
5. Working Temperature: -40°C ~ +105°C.
6. Harmful material should be compliant to doc. "EI-0005" standards.
7. Product number matrix:


DEAAAXXXBX00

Plating Code:

Definition	Code
● Tin plated	A
● Gold plated(Function area)	
flash B 15u" F	
10u" E 30u" J	
● Duplex plated(Function area)	
flash K 15u" P	
10u" N 30u" U	
● Standard: B	

Number of contacts
030~080:30~80PIN
100~140:100~140PIN

B:MPAD+REEL

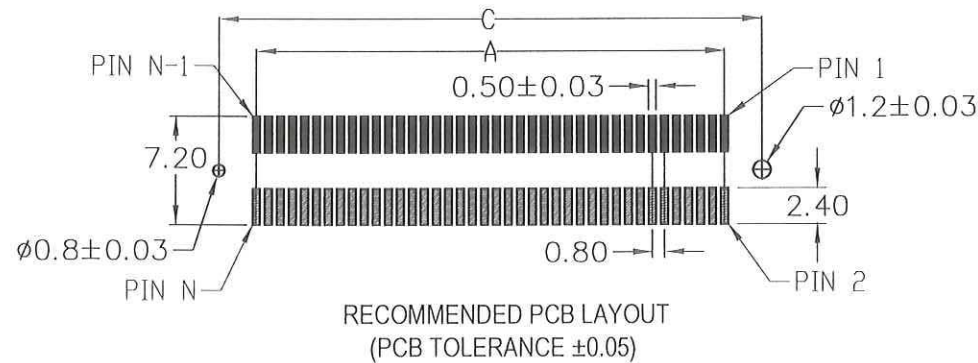

CIRCUITS	DIM.A	DIM.B	DIM.C
30	11.20	17.80	16.20
40	15.20	21.80	20.20
50	19.20	25.80	24.20
60	23.20	29.80	28.20
80	31.20	37.80	36.20
100	39.20	45.80	44.20
120	47.20	53.80	52.20
140	55.20	61.80	60.20

PLASTREN

TOLERANCE TABLE	
X. ± 0.30	X.° ± 3°
.X ± 0.25	.X° ± 2°
.XX ± 0.20	


SCALE	2:1
UNIT	mm
SIZE	A4

DRAWN	齐如军
CHECK	齐如军
APPROVE	齐如军


DATE	2019/11/08
DATE	2019/11/11
DATE	2019/11/11

DWG. NO.	600-0000-2007
PARTS NO.(INTENDED USE)	DEAAAXXXBX00


TITLE	CUSTOMER DRAWING
REV.	1
SHEET	1/3

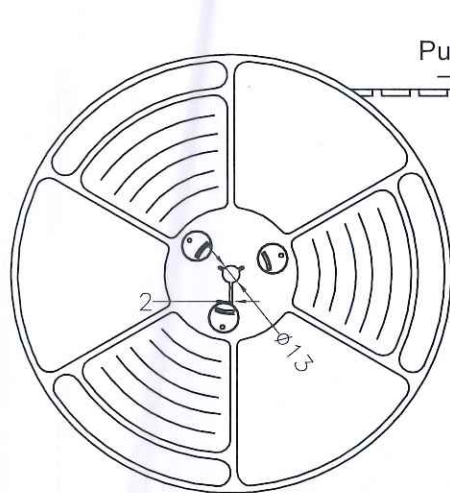

出料方向
Pull out direction

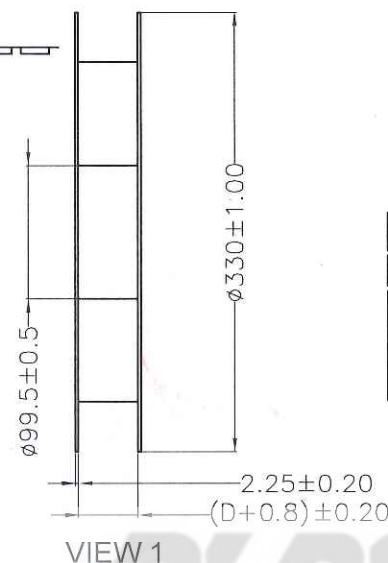

VIEW 1

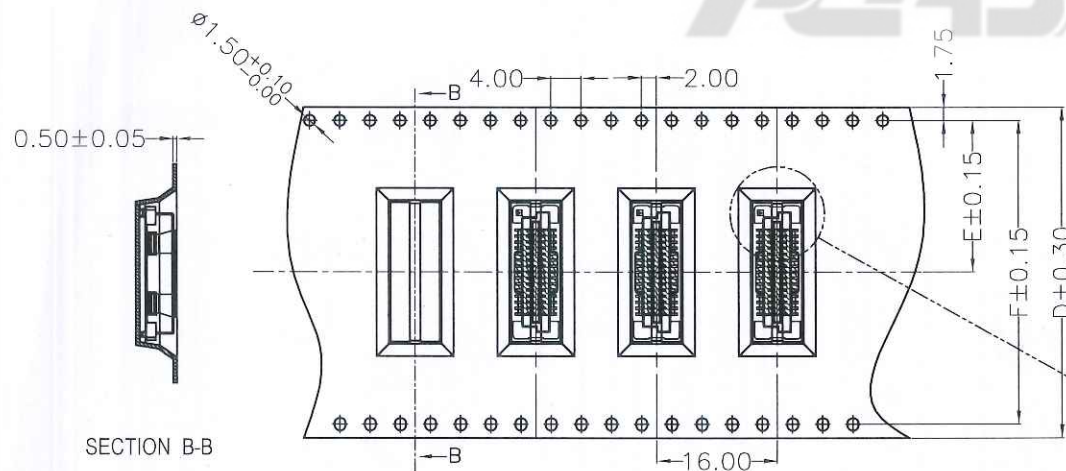


SECTION B-B

备注 (NOTES):

1. 带子引导长度
Lead tape length

转绕方向

Pull out direction

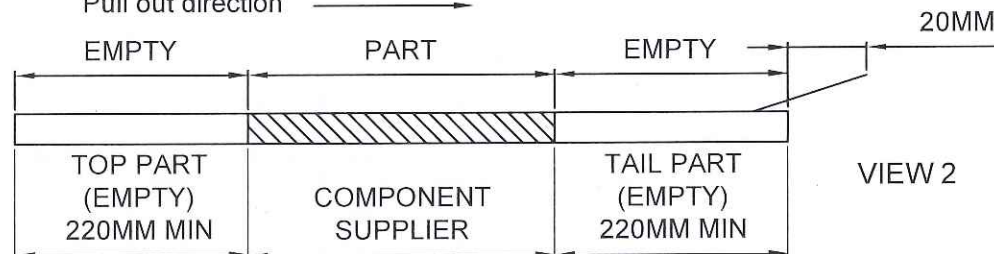

VIEW 2


2. 上带剥拉力为: 0.2~1.3N (20gf~130gf)

Peeling off force of top tape :0.2~1.3N (20gf~130gf)

出货运输过程中一定注意: 卷带在运输过程中不能散开


This requirement should be applied at shipment:

The reel tape can not be separated during transportation.

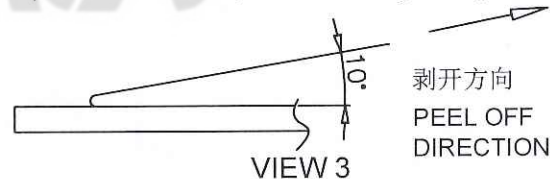

VIEW 3

剥开方向
PEEL OFF
DIRECTION



Loading
direction mark

ITEM	P/N	DIM.F	DIM.E	DIM.D
REEL & FILM+REEL & MPAD+REEL	30PIN	40.40	20.20	44.00
	40PIN	40.40	20.20	44.00
	50PIN	40.40	20.20	44.00
	60PIN	52.40	26.20	56.00
	80PIN	52.40	26.25	56.00
	100PIN	68.40	34.25	72.00
	120PIN	68.40	34.25	72.00
	140PIN	84.40	42.25	88.00



TOLERANCE TABLE	
XX. ±	XXX. ±
X. ± 0.40	.XXX ±
.X ± 0.25	X.° ± 3°
.XX ± 0.15	.X.° ± 2°

SCALE	1: 1
UNIT	mm
SIZE	A4

DRAWN
CHECK
APPROVE

齐如军
朱建群


DATE
DATE
DATE

2019/11/08
2019/11/11
2019/11/11


DWG. NO.
600-0000-2007
PARTS NO.(INTENDED USE)
DEAAAXXXBX00

TITLE
CUSTOMER DRAWING

REV.
1
SHEET
2/3

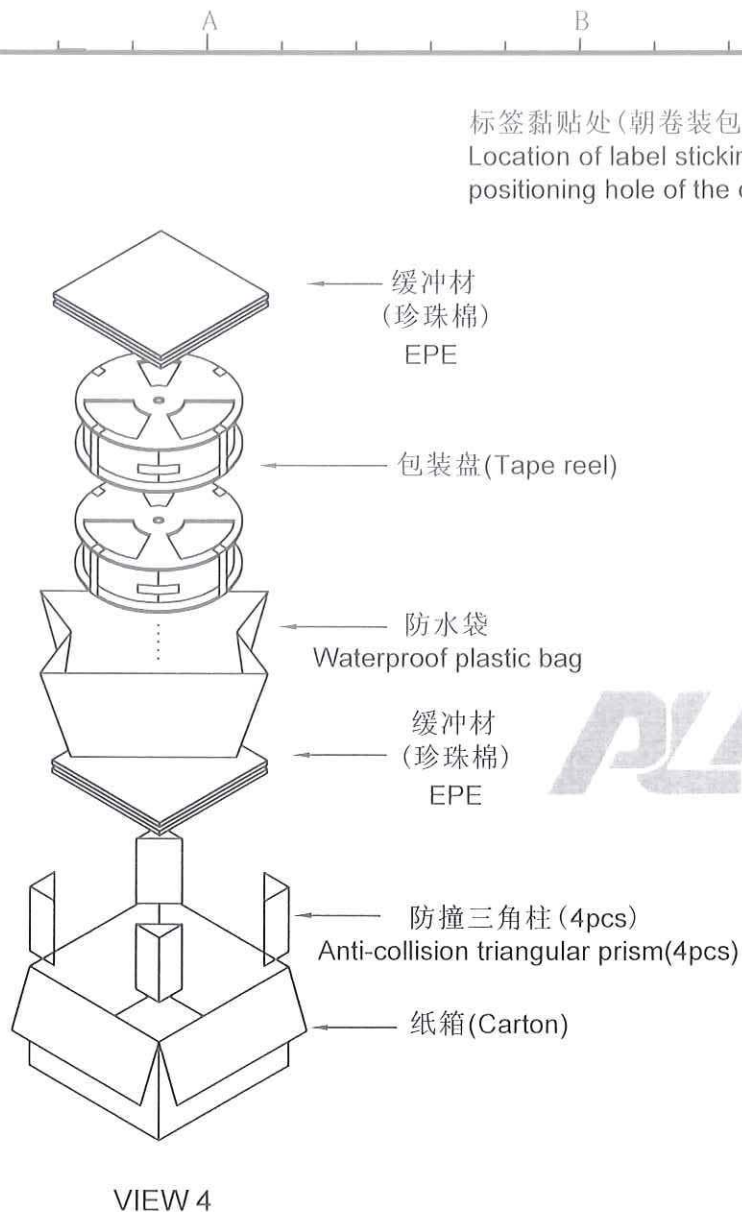

标签黏贴处 (朝卷装包材的小定位孔一侧)
Location of label sticking (label at small positioning hole of the carrier tape side)

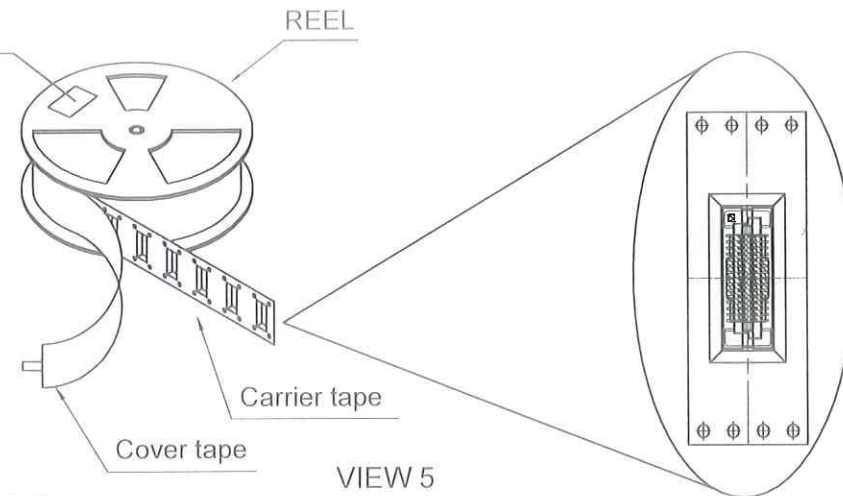

备注 (NOTES):

- 每卷包装数量及每箱装箱数量如下表格。
Packing q'ty of each reel & carton as below table shown.
- 上胶带覆盖下包装带用自粘包装。
Use cover tape to cover and seal up.
- 每个纸箱放2个珍珠棉。
Every carton use 2pcs EPE.
- 将装满产品的卷盘放入纸箱以胶带封口。
Put reels in the carton and use adhesive tape to seal up.

产品料号 (Product No.)	包装容量 (Packing capacity)		
	PCS/REEL	REELS/CARTON	PCS/CARTON
DEAAA030BX00	500	4	2000
DEAAA040BX00	500	4	2000
DEAAA050BX00	500	4	2000
DEAAA060BX00	500	3	1500
DEAAA080BX00	500	3	1500
DEAAA100BX00	500	2	1000
DEAAA120BX00	500	2	1000
DEAAA140BX00	500	2	1000

PLASTREN

TOLERANCE TABLE		SCALE 1:1		DRAWN	齐如军	DATE	2019/11/08	DWG. NO.	600-0000-2007	TITLE	CUSTOMER DRAWING	REV.	1	
X. ± 0.30	X° ± 3°	UNIT mm		CHECK	陈国白	DATE	2019/11/11	PARTS NO.(INTENDED USE)				DEAAAXXB00	SHEET	3/3
.X ± 0.25	.X° ± 2°	SIZE A4		APPROVE	朱伟东	DATE	2019/11/11							
.XX ± 0.20														